

VITECTOR




FRABA

LICHTSCHRANKE / PHOTO EYE / BARRIÈRE PHOTOÉLECTRIQUE

DRO-S 1012



WN917003-6-50

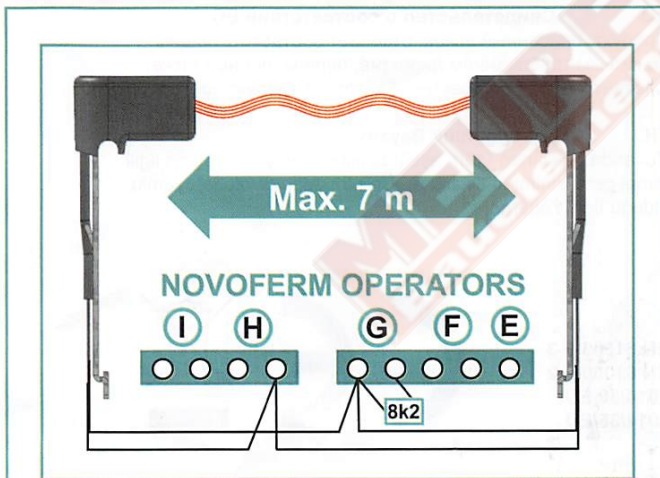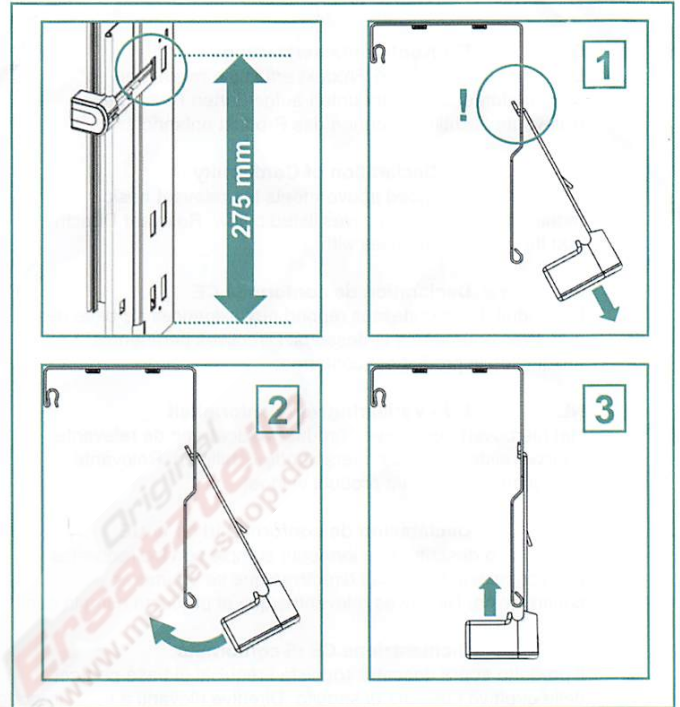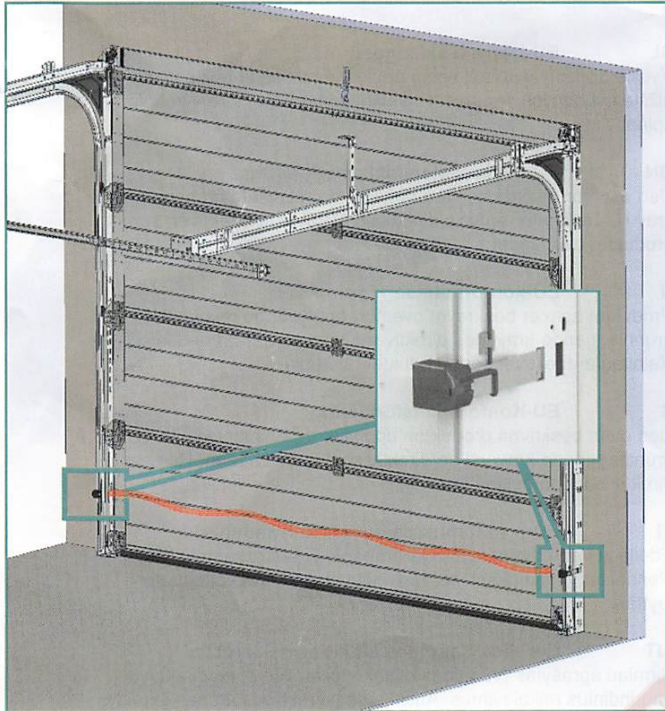

Versorgungsspannung Supply Voltage Tension d'Alimentation	10 ... 30 VDC
Stromaufnahme Current Consumption Consommation de Courant	9 mA @ 12 V (470 Ω) 10 mA @ 24 V (820 Ω)
Frequenz Frequency Fréquence	325 Hz (± 5%)
Betriebstemperatur Operating Temperature Température de Service	-20 °C ... 60 °C
Schutzart Protection Class Classe de Protection	IP44

Nur für trockene Räume! / Dry rooms only! / Pour utilisation dans des locaux secs uniquement

